


DATASHEET

U-DQ(ZN)BH 9/125µ G657A1 1750N

G657A1

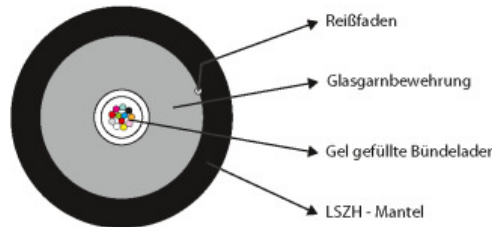

Description

Application:

For fixed installation indoor and outdoor

In cable ducts, tubes and interconnections

Mechanical installation by winch is permitted only when using force meters with recording function

Not suitable for underground laying (direct buried)

Characteristics:

Universale cable

Suitable for connector assembly

The cable diameter can vary

General data

Application	indoor/outdoor
Blow in	No
Radial water blocking	False
Longitudinal water blocking	True
Cable metal free	True
With rodent protection	True
Circuit integrity	No

Mechanical characteristics

Crush resistance	150 N/dm
Longitudinally watertight	3/24 m/h

DATASHEET

U-DQ(ZN)BH 9/125 μ G657A1 1750N

Cable construction

Fibre type	Singlemode
Fibre category	G657.A1
Type of tube	Central loose tube
Cable \emptyset	Up to 12 fibers: 3.5 ; Up to 24 fibers: 4.0 mm
Fiber marking	Colour
Tube marking	Colour
Strain relief	True
Armouring	True

Cable sheath

Material outer sheath	LSZH
Euro Class	Dca
Colour outer sheath	black
Flame retardant	acc. EN 60332-3-24
Halogen free	acc. EN 60754-1/2
Low smoke	acc. EN 61034-2
Oil resistant	No
Resistant to chemicals	False

Environmental conditions

Temperature Range (Operation)	-20 – 60 °C
Temperature Range (Storage)	-25 – 70 °C
Temperature Range (Installation)	-5 – 50 °C

Transmission characteristics

Rayleigh Backscatter Coefficient 1310nm	1,4676
Rayleigh Backscatter Coefficient 1550nm	1,4682
IL max. (dB/km) 1310nm	0,36
IL max. (dB/km) 1550nm	0,22

Standards, approvals, certifications

Harmonized standard	EN 50575
Transmission standards	IEEE 802.3 10Mbit to 100Gbit

Available variants

Article no.	Title	VDE-Name	Construct	Cable \emptyset	Weight	Bending radius	Tensile Force
-------------	-------	----------	-----------	-------------------	--------	----------------	---------------

DATASHEET

U-DQ(ZN)BH 9/125 μ G657A1 1750N

54404.1L-CPR	INFRALAN® U-DQ(ZN)BH 4E 9/125 μ , G657A, LSZH black CPR Dca	U-DQ(ZN)BH 4E9/125	04E (1 x 4) singlemode G.657.A1	7.0 mm	55 kg/km	140 mm	1750 N
54408.1L-CPR	INFRALAN® U-DQ(ZN)BH 8E 9/125 μ , G657A, LSZH black CPR Dca	U-DQ(ZN)BH 8E9/125	08E (1 x 8) singlemode G.657.A1	7.0 mm	55 kg/km	140 mm	1750 N
54412.1L-CPR	INFRALAN® U-DQ(ZN)BH 12E 9/125 μ , G657A, LSZH black CPR Dca	U-DQ(ZN)BH 12E9/125	12e (1 x 12) singlemode G.657.A1	7.0 mm	55 kg/km	140 mm	1750 N
54424.1L-CPR	INFRALAN® U-DQ(ZN)BH 24E 9/125 μ , G657A, LSZH black CPR Dca	U-DQ(ZN)BH 24E9/125	24E (1 x 24) singlemode G.657.A1	7.5 mm	60 kg/km	150 mm	1750 N

accessory

39926.1

Miller® Fiber Cleaning Tapes