

1

2


3

4

Tolerances unless otherwise specified	
Length	Tolerances
L ≤ 0.5m	-0mm, +50mm
0.5m < L ≤ 5m	-0mm, +100mm
5m < L ≤ 20m	-20mm, +150mm
L > 20m	±1%

A

A

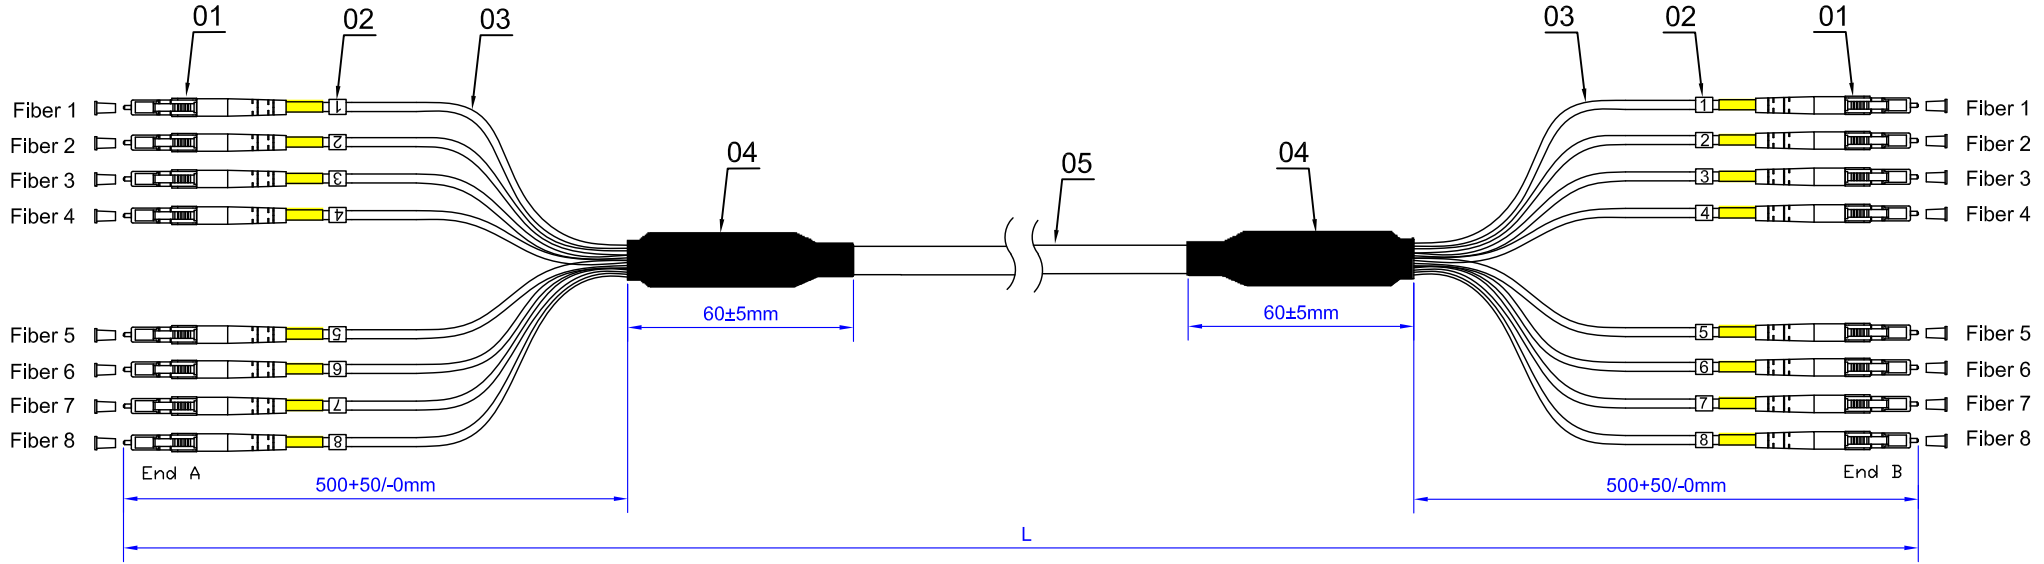

B

B

- Technical Requirements
- Fiber: G657A1 SingleMode.
 - Polishing type:End A/End B:LC/APC 8°.
 - Insertion Loss:≤ 0.12dB Mean,≤ 0.25dB Max.(Grade B).
Return Loss:≥65dB.
 - Standards:
IEC 61300-3-35, endface inspection.
IEC 61300-3-34,IL measurement procedures.
IEC 61300-3-6, RL measurement procedures.
 - The length L is customized.

C

C

D

D

06			
05	Φ6.0mm 8Core G657A1 Round LSZH Yellow Outdoor/Indoor Cable	L	
04	Black adhesive heat shrinkable tube	2	
03	Φ2.0mm LSZH Yellow Jacket	L	
02	Labeling ring(1-8)	16	
01	Φ2.0mm LC/APC SM Simplex Green Connector(Green Boot)	16	
NO.	DESCRIPTION	Q'TY	

TITLE	8Core LC/APC-LC/APC G657A1 Grade B Patchcord
-------	--

1

2

3

4