


GPON READY

5G READY

The Fiber Optic Box ORM 3 SL 12S is designed for the placement of up to 12 optical splices both indoors and outdoors. The box may be complemented by a simple bracket for being post-mounted.

- ▶ Capacity of 12 optical splices
- ▶ Integrated fibre management
- ▶ 1 × KM3 splice tray for the placement of optical splices
- ▶ Possibility of PLC splitter placement
- ▶ Placement of optical fiber reserve, length 3m
- ▶ Fixation of input/output cables
- ▶ 1 × universal rubber bushing (for "omega" and individual inputs/outputs)
- ▶ 2 × \varnothing až 10 mm a 8 × \varnothing to 5 mm
- ▶ Use only for fibers G657a,b
- ▶ Lid is fixed with screws
- ▶ Easy assembly
- ▶ Wall-mounted or post-mounted

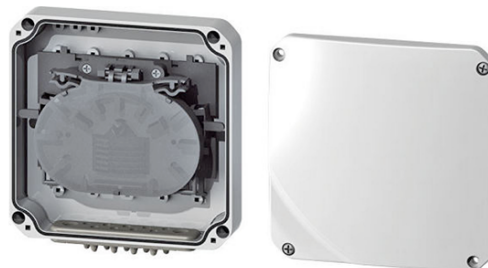

TECHNICAL SPECIFICATIONS

Inputs / Outputs (quantity × range)	2 × 3–9 mm, 9 × 1.8–5 mm
Grommets (type and number of used grommets)	express port
Ingress Protection	IP54
Impact Protection	IK10
UV Resistance	yes
Flammability Degree	V0
Material	PC / ABS
Color	light gray RAL 7035
Dimensions (H × W × D)	136 × 136 × 46 mm
Weight	0.4 kg
Environment	indoor outdoor
Number of Splices	1–12
Number of Connectors	only splicing

ORDERING CODES

85K3.60/0000F	Fiber Optic Box ORM 3 SL 12S
---------------	------------------------------

More information: <https://www.micostelcom.com/en/fiber-optic-boxes/fiber-optic-box-orm-3-sl-12s>