

Always. Reliable. Tight.

System cover


cable seal with cold shrink-fit method

HSI 150-D1/80-KS

Article no.: 2102100010



- **Mechanical fixing (bayonet) and seal (clamping nut) act independently**
- **Bayonet system with return lock and locking screw connection (for protection against automatic opening)**

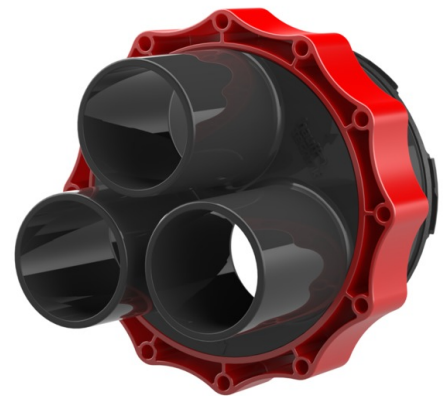

For use in wall insert and plastic flange HSI 150. The cold shrink sleeves support a wide area of application. They are shrunk onto the cables by the system cover socket without tools. Empty system cover sockets can be sealed with blind plugs.

FACTS

Application range:

- Standing seepage water, Pressurised water, Waterproof concrete stress class 1

Advantages:

- Wide area of application
- Best possible shrink result thanks to centring straps
- Gentle sealing
- Shrink-fit method without tools
- Permanently elastic shrink tubing

Scope of delivery:

- Cold shrink sleeves
- Centring strap for HSI 150-D1/80-KS and HSI 150-D3/58-KS

Properties:

- The cold shrink-fit method is used on the outside of the building

Material:

- System cover with socket: polycarbonate
- Clamping nut: PC/PBT blend
- Cold shrink sleeve: EPDM
- Centring strap: EPDM

Tightness:

- Gastight and watertight to 2.5 bar

FEATURES

Socket diameter: 80
Number of cables/medium: 1
Cable diameter: 38 - 78

PICTURES

