


Tolerances unless otherwise specified	
Length	Tolerances
$L \leq 0.5m$	-0mm, +50mm
$0.5m < L \leq 5m$	-0mm, +100mm
$5m < L \leq 20m$	-20mm, +150mm
$L > 20m$	$\pm 1\%$

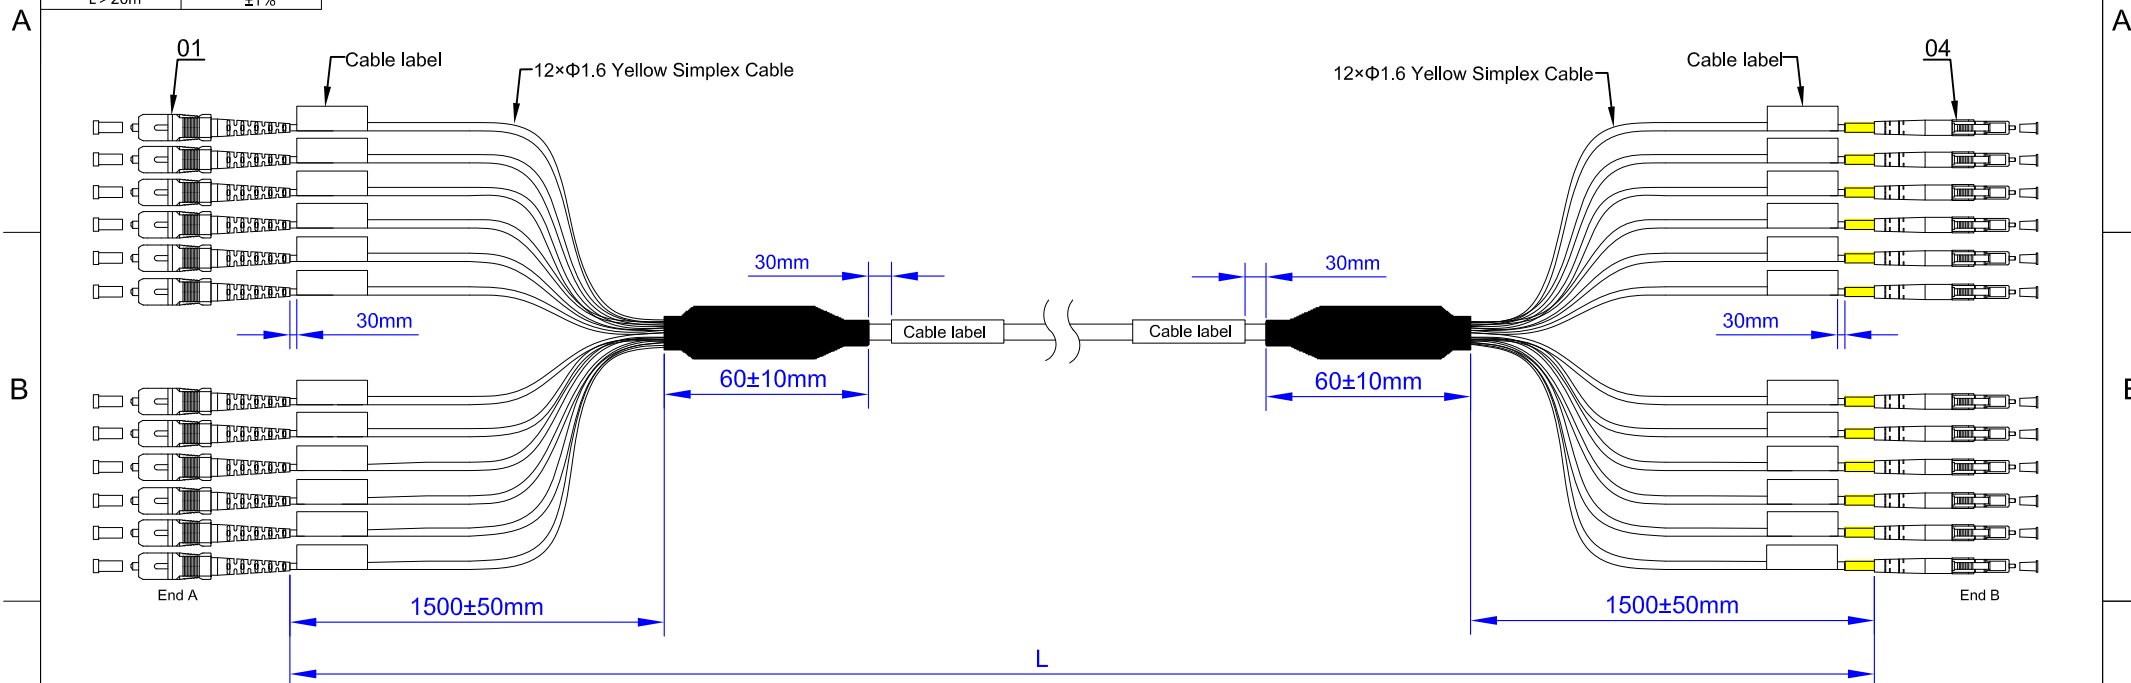

### Technical Requirements

1. Fiber: G657A1 SingleMode.
2. Polishing type: End A: SC/UPC, End B: LC/UPC.
3. Insertion Loss:  $\leq 0.25dB$  (Max).  
Return Loss:  $\geq 50dB$ .
4. Standards:  
IEC 61300-3-35, endface inspection.  
IEC 61300-3-4, IL measurement procedures.  
IEC 61300-3-6, RL measurement procedures.
5. The length L is customized.

D	06				SC/UPC-LC/UPC G657A1 12Core Patchcord
	05				
	04	Φ2.0mm LC/UPC SM Simplex Blue Connector(White Boot)	12		
	03	12Core G657A1 Round LSZH Yellow Indoor Cable	L		
	02	Black adhesive heat shrinkable tube(L=80mm)	2		
	01	Φ2.0mm SC/UPC SM Simplex Blue Connector(Blue Boot)	12		
	NO.	DESCRIPTION	Q'TY		

1

2

3

4