
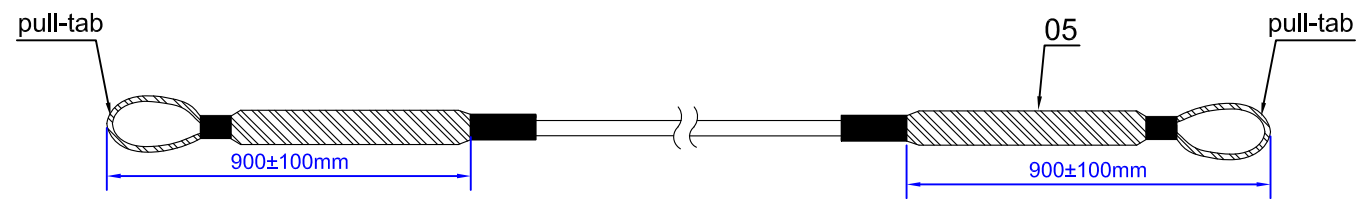


Tolerances unless otherwise specified	
Length	Tolerances
L ≤ 0.5m	-0mm, +50mm
0.5m < L ≤ 5m	-0mm, +100mm
5m < L ≤ 20m	-20mm, +150mm
L > 20m	±1%

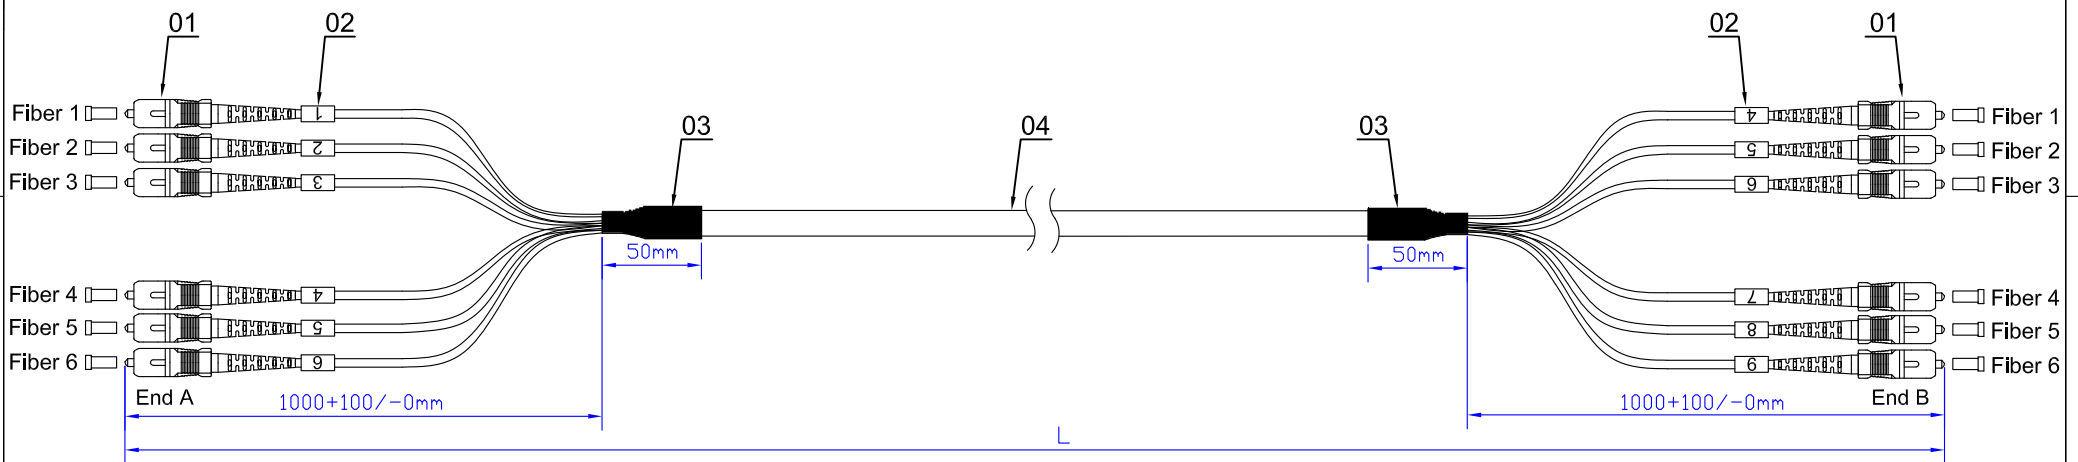

Technical Requirements

1. Fiber: OM2 50/125 Multi Mode.
2. Polishing type: End A/End B: SC/UPC.
3. Insertion Loss: ≤ 0.30dB(850nm).
Return Loss: ≥ 30dB(850nm).
4. Standards:
IEC 61300-3-35, endface inspection.
IEC 61300-3-4, IL measurement procedures.
IEC 61300-3-6, RL measurement procedures.
5. The length L is customized.

06					
05	Black braided mesh tube	L			
04	6Core OM2 50/125 Round LSZH Orange Cable ,Inner 2.0mm Cable	L			
03	Black heat shrinkable tube	100mm		TITLE	SC/UPC-SC/UPC 6Core OM2 50/125 Patchcord
02	Labeling ring	12			
01	Ø2.0mm SC/UPC MM Simplex Beige Connector(Beige Boot)	12			
NO.	DESCRIPTION	Q'TY			