


Productinformatie

DuraMulti Low Smoke Halogen Free was engineered to be installed indoors where flame retardant characteristics are critical.

Two or more DuraMicro pathways are factory bundled under a polyethylene oversheath for one easy-to-handle unit. DuraMulti is available in a variety of configurations, with several options for DuraMicro sizes.

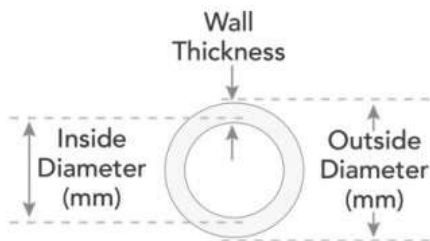

Made from Flame Retardant Low Smoke Halogen Free materials

Pressure resistance minimum 15 bar

Silicore, permanently lubricated inner lining provides a lower inner coefficient of friction (<0.1) for maximum cable blowing length

High-quality materials formulated for long-life expectancy

Available in configurations with 2 to 24 DuraMicro pathways, with sizes ranging from 5 mm - 12 mm OD

| Parameter | Waarden |
|--|---------------|
| Maximale afmeting van de doorsnede (MAX) | 5 mm |
| Minimale afmeting van de doorsnede (MIN) | 5 mm |
| Mantel dikte | 0.75 mm |
| Transport en opslag temperatuur | -40°C - +70°C |
| Installatie temperatuur | -10°C - +50°C |
| Operatie temperatuur | -40°C - +70°C |
| Minimale buigradius | 50 mm |

DETAILS

Footage/Meter Markings

Internal Ribs

OPTIONS

Silicore®